




**ARM PURIFICATION**  
BY APPLIED ENERGY SYSTEMS



# NOVA™ Rare Gas Purifier

## Heated Getter Technology



### SPECIFICATIONS

#### GASES PURIFIED

- Ar, He, Ne, Xe, Kr

#### DESIGN FLOW RATE

Up to 10 slpm

#### IMPURITIES REMOVED

- Oxygen (O<sub>2</sub>) < 1 ppb
- Carbon Monoxide (CO) < 1 ppb
- Carbon Dioxide (CO<sub>2</sub>) < 1 ppb
- THC (as CH<sub>4</sub>) < 1 ppb
- Moisture (H<sub>2</sub>O) < 1 ppb
- Hydrogen (H<sub>2</sub>) < 1 ppb
- Nitrogen (N<sub>2</sub>) < 1 ppb

#### MAXIMUM PRESSURE

150 PSIG

#### FILTRATION

Standard 1.5 nm

#### HOUSING MATERIAL

316L Stainless Steel

#### MANUAL BYPASS

#### LIFETIME INDICATOR

#### REMOTE ELECTRONICS

# Nova Series Key Features & Applications

## OPTIMIZED DESIGN

Leverages **front panel status indicators** and a preset temperature controller.

## QUALITY MATERIALS

Utilizes high purity **316L stainless steel** with **electropolished wetted surfaces**.

## FLOW RATE VERSATILITY

Allows for **flow rates of up to 10 slpm**.

## EASE OF INSTALLATION

Offers a **compact, sturdy steel-vented enclosure, and a wall-mountable panel** for ease of installation.

## FLEXIBLE POWER OPTIONS

Integrates with a number of power input options (**see below**).

## APPLICATIONS

The Nova™ Series Purifiers are optimized for a variety of high-precision applications, including:

- Semiconductors & Electronics
- Clean Energy & Solar
- Pharmaceuticals & Biotechnology
- Industrial Manufacturing
- Universities & Research Labs

# Nova Series Power Options

## POWER RECEPTACLE REQUIREMENTS

All NOVA models are for use with single-phase power sources only and require properly grounded and polarized receptacles as shown in the diagrams below.


Before plugging in the power cord, verify that power receptacle AC voltage and polarity is correct by measuring voltage with a voltmeter. Measure 0 volts between Neutral and Ground. Measure Line voltage shown between Line and Ground. Incorrect voltage or polarity will damage the Purifier electronic controls or may prevent the purifier from heating correctly.

### 100-120 VAC, 1 Ø, 50-60 Hz

POWER FUSE INSTALLED: 10A

REQUIRES GROUNDED AND POLARIZED RECEPTACLE

**MODEL -115N**

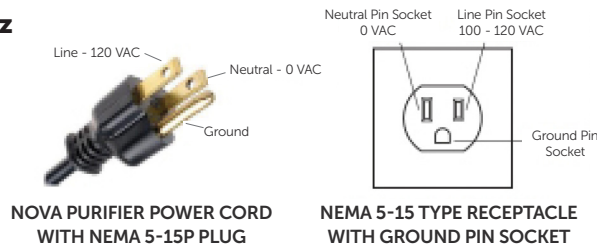

NOVA PURIFIER POWER CORD WITH NEMA 5-15P PLUG


NEMA 5-15 TYPE RECEPTACLE WITH GROUND PIN SOCKET

### 220-240 VAC, 1 Ø, 50-60 Hz

POWER FUSE INSTALLED: 10A

REQUIRES GROUNDED AND POLARIZED RECEPTACLE

**MODEL -230C**

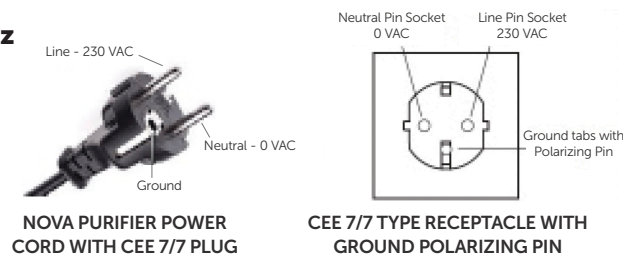

NOVA PURIFIER POWER CORD WITH CEE 7/7 PLUG

CEE 7/7 TYPE RECEPTACLE WITH GROUND POLARIZING PIN


NOTE: Use of non-polarized receptacles such as CEE 7/4 (Schuko) type is not permitted and will damage the Purifier electronic controls if incorrect polarity is encountered.

### 220-240 VAC, 1 Ø, 50-60 Hz

POWER FUSE INSTALLED: 10A

REQUIRES GROUNDED AND POLARIZED RECEPTACLE

**MODEL -230B**



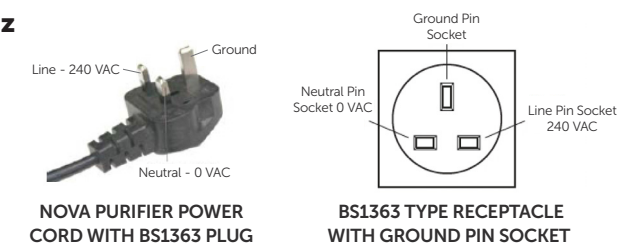


NOVA PURIFIER POWER CORD WITH BS1363 PLUG

BS1363 TYPE RECEPTACLE WITH GROUND PIN SOCKET


NOTE: Purifier power cord plug also includes a replaceable 13A safety fuse.

# Nova Series Dimensions

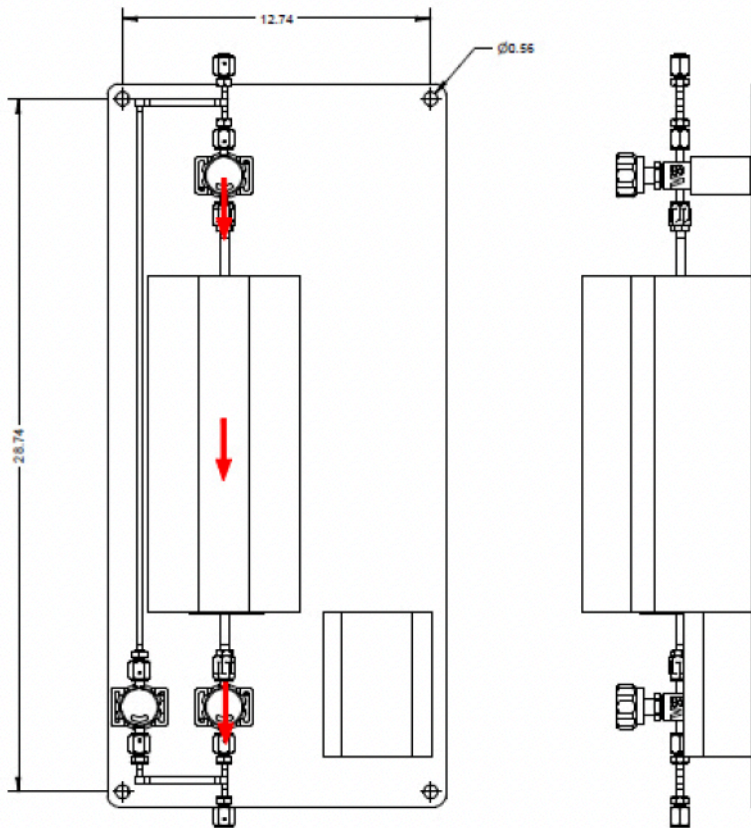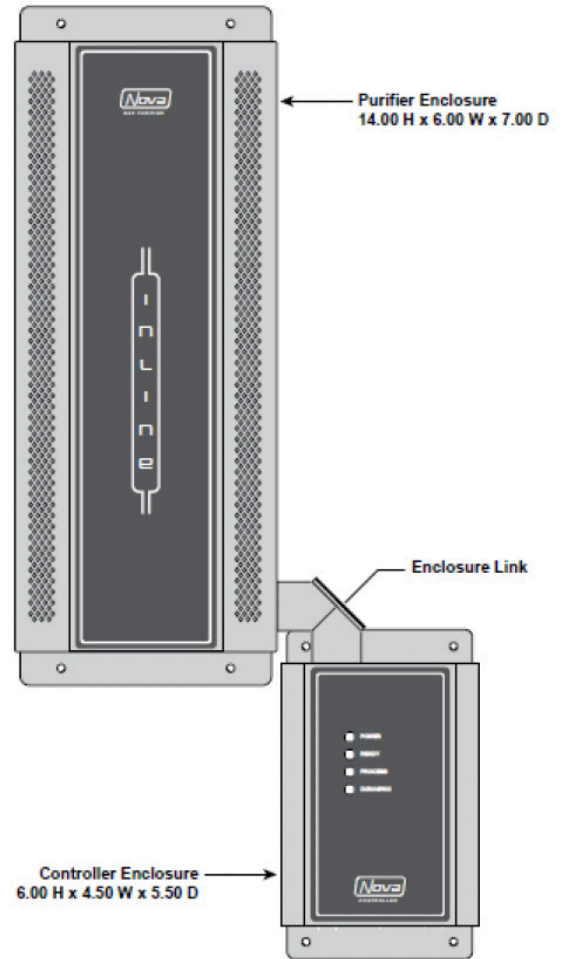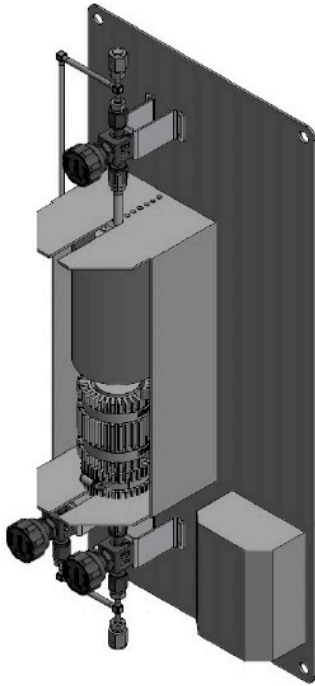

# Nova Series Ordering Information

Example: NOVA Rare Gas Purifier

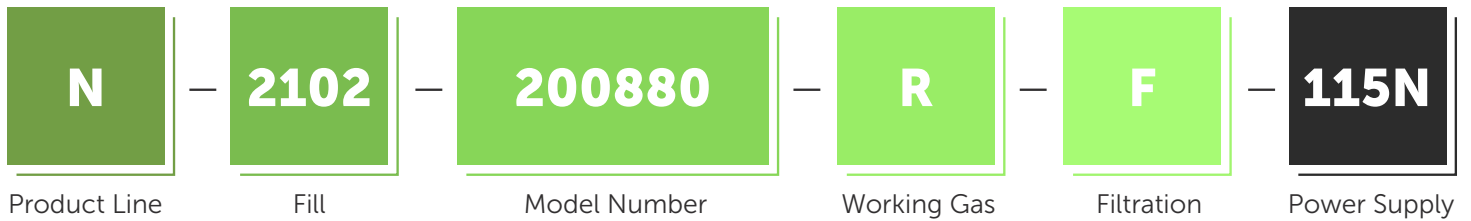

## Product Line

N - Nova Series

## Fill\*

2102 - Rare Gas Media

\*Other options available for nitrogen and methane.

## Model Number

200880 - For flow rates up to 10 slpm

## Working Gas

R - Rare Gases that contain < 10ppm N<sub>2</sub>

## Filtration

F - 1.5 nm filter

## Power Supply

115N - 115V with Nema plug  
 230C - 230V with CEE 7/7 plug  
 230B - 230V with BS 1363 plug

## DON'T SEE WHAT YOU NEED?

Speak to our team about your requirements and we can work with you to identify the purifier solution best suited for your application.

## Place an Order

[orders@appliedenergysystems.com](mailto:orders@appliedenergysystems.com)

Contact your ARM Purification sales rep or visit [armpurification.com/request-quote/](http://armpurification.com/request-quote/)